

Technical Data Sheet

High Power Infrared LED

[HIR-C19D-1N90/L558-P03/TR](#)



Features

- Small package with high efficiency
- Peak wavelength $\lambda_p=855\text{nm}$
- Soldering methods:SMT
- Thermal resistance (junction to lead): 11 /W.
- Pb free
- The product itself will remain within RoHS compliant version.


Descriptions

- HIR-C19D-1N90/L558-P03/TR series is an infrared emitting diode in miniature SMD package which is molded in a water clear silicone with spherical top view lens.
- The device is spectrally matched with silicon photodiode, Phototransistor.

Applications


- CCD Camera
- Infrared applied system

Package Dimensions

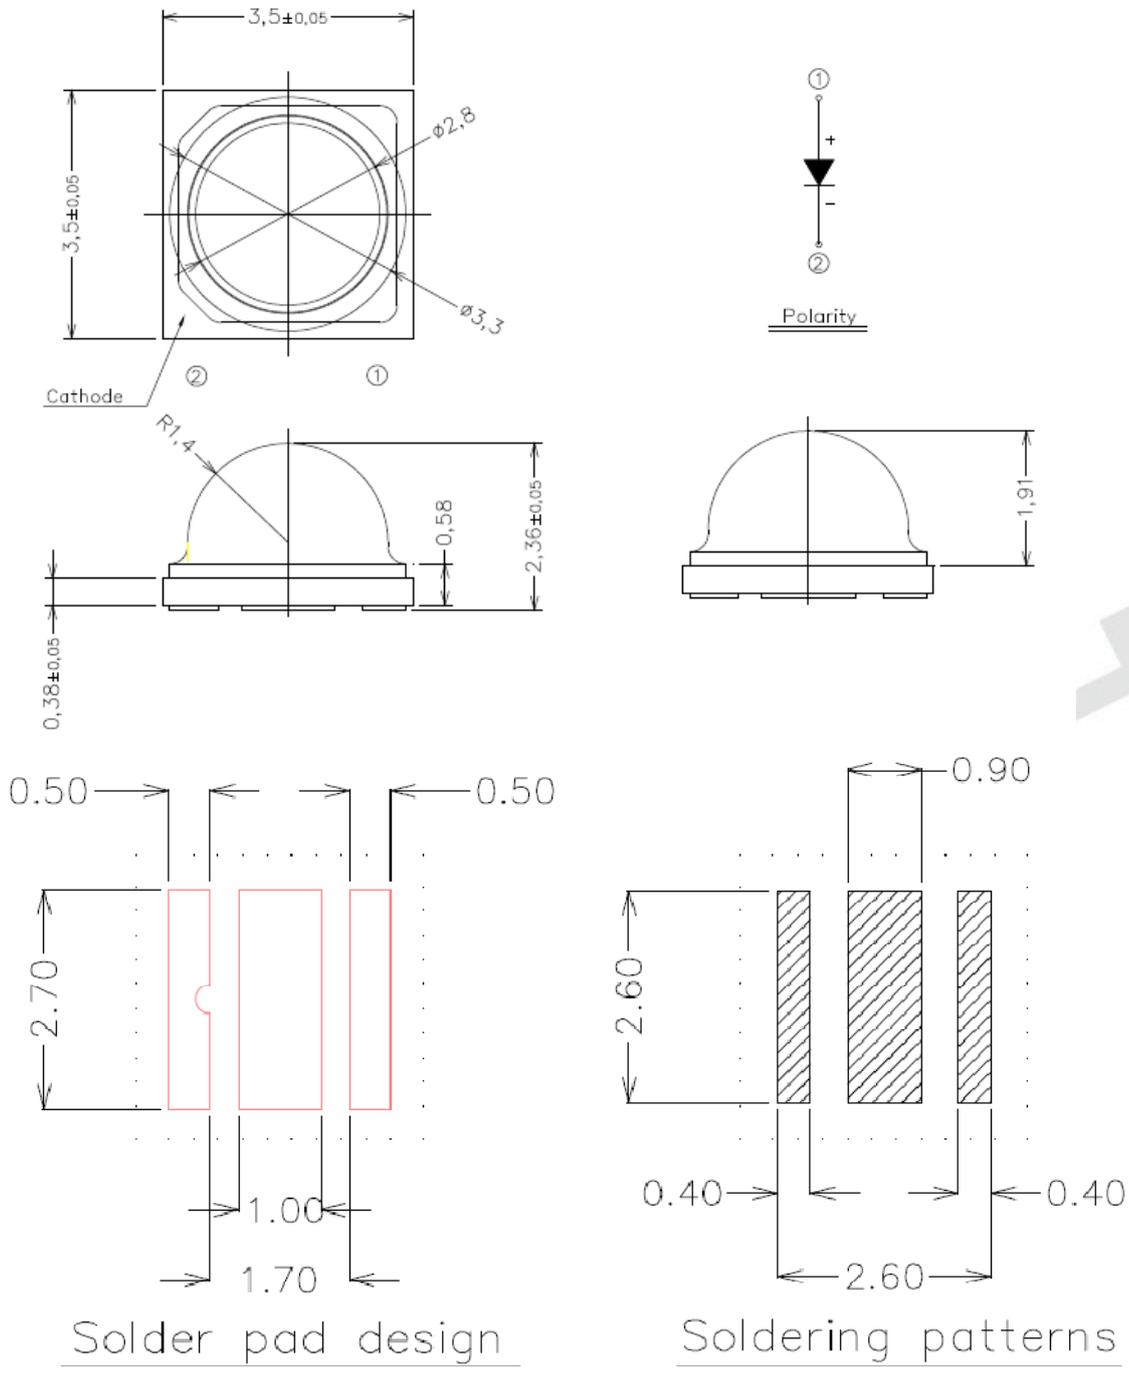

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are ± 0.1 mm.
3. Do not handle the device by the lens. Incorrect force applied to the lens may lead to the failure of devices.

Pad Configuration

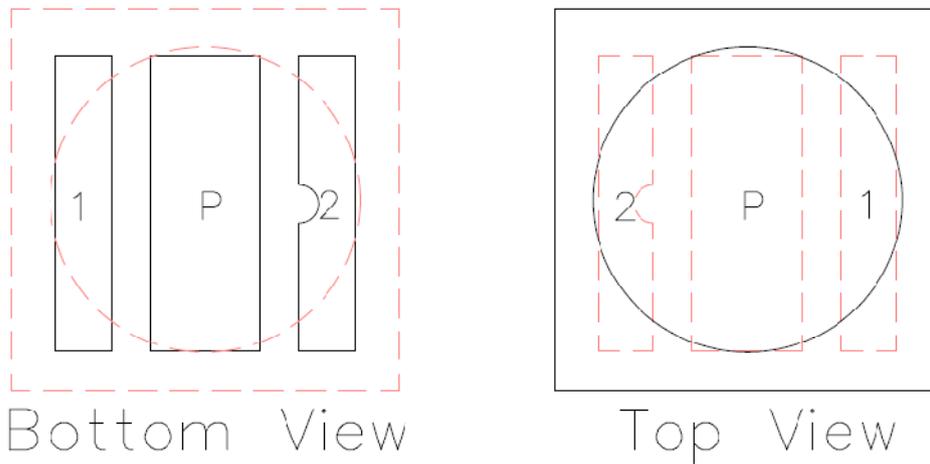

PAD	FUNCTION
1	ANODE
2	CATHODE
P	THERMAL PAD


Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit
Forward Current	I _F	1	A
Reverse Voltage	V _R	5	V
Operating Temperature	T _{opr}	-40 ~ +85	
Storage Temperature	T _{stg}	-40 ~ +100	
Junction temperature	T _j	115	°C
Thermal resistance (junction to leadframe)	R _{th(j-L)}	11	/W
Power Dissipation @I _F =1000mA	P _d	3.7	W

Note: We suggest that customer should add the heat sink with HIR-C19D-1N90/L558-P03/TR to exclude the heat.

Electro-Optical Characteristics (Ta=25)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Total Radiated Power	Po	IF=350mA	--	350	--	mW
		IF=700mA	--	700	--	
		IF=1A	--	1030	--	
Radiant Intensity	IE	IF=350mA	150	170	--	mW/sr
		IF=700mA	330	350	--	
		IF=1A	450	470	--	
Peak Wavelength	λp	IF=350mA	--	855	--	nm
Spectral Bandwidth	Δλ	IF=350mA	--	25	--	nm
Forward Voltage	VF	IF=350mA	--	3.1	--	V
		IF=700mA	--	3.4	--	
		IF=1A	--	3.7	--	
Reverse Current	IR	VR=5V	--	--	10	μA
View Angle	2θ1/2	IF=20mA	--	90	--	deg

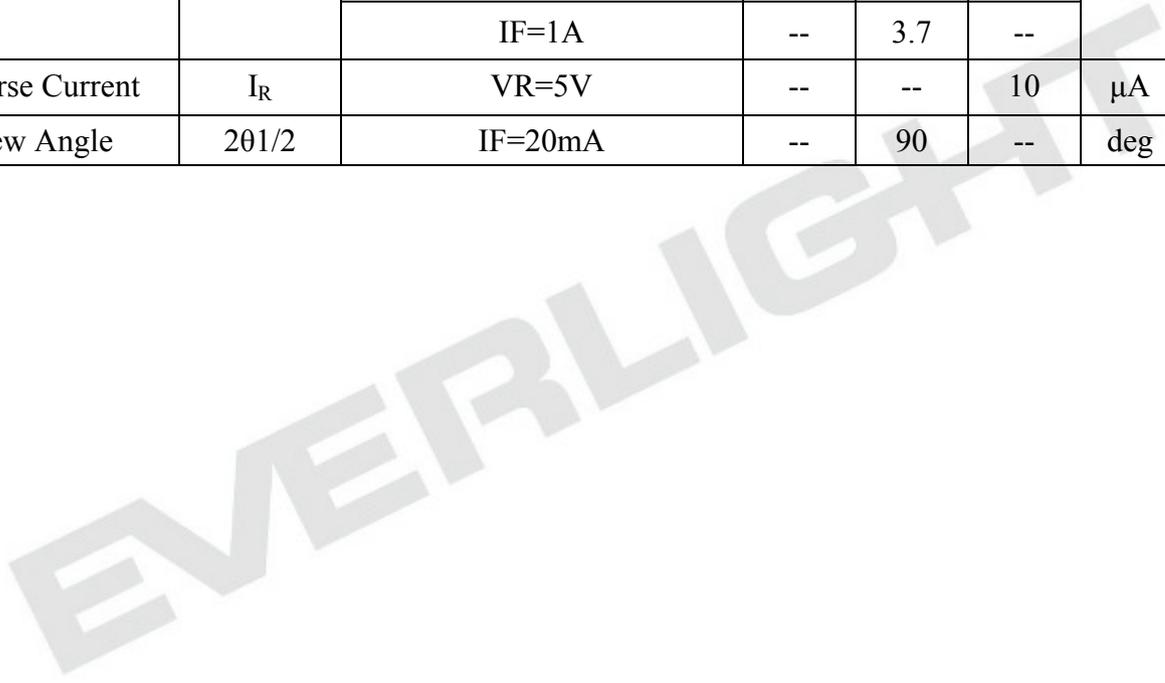

Typical Electro-Optical Characteristics Curves

Fig.1 Ambient Temperature vs. Forward Current

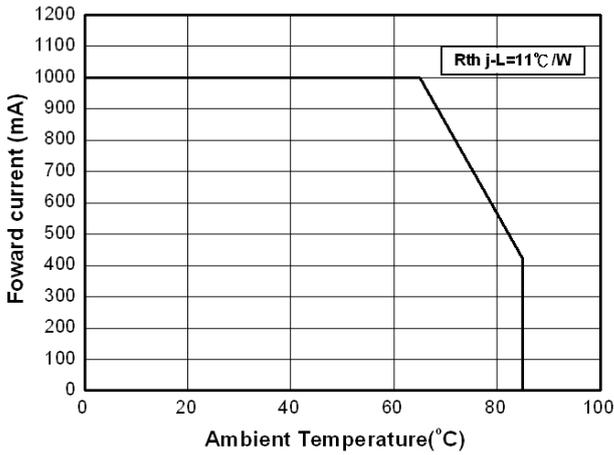


Fig.2 Forward Current vs. Forward Voltage

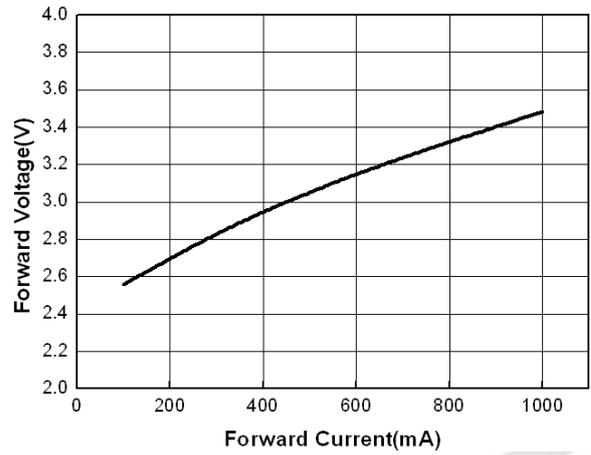


Fig.3 Spectral Distribution Angular Displacement

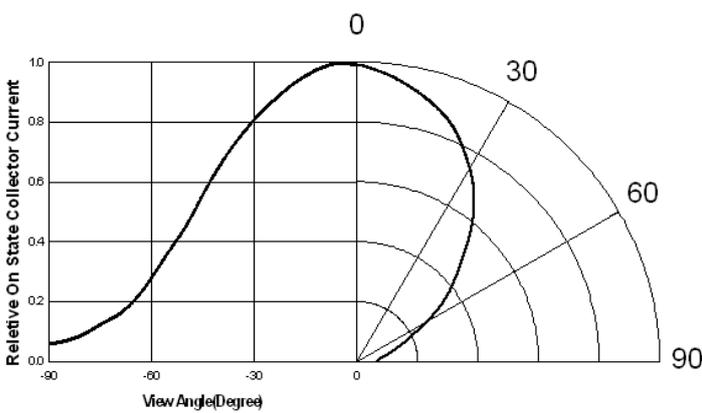


Fig.4 Spectral Distribution


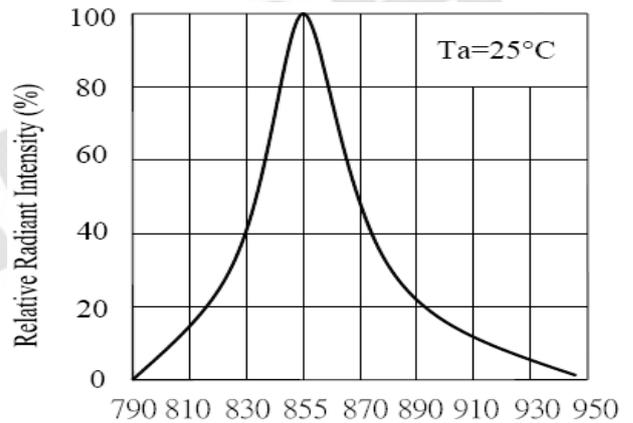



Fig.5 Forward Current vs. Radiant Intensity

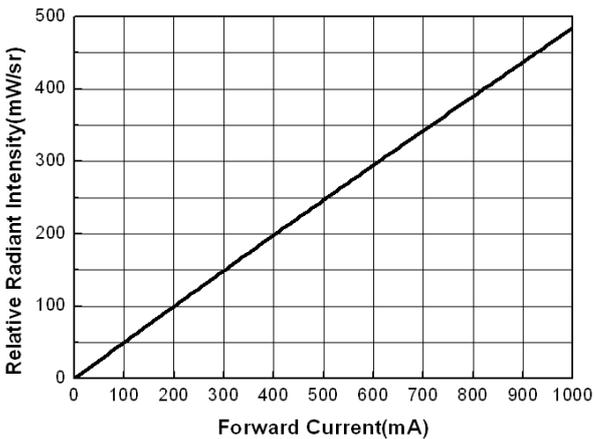

Reflow Soldering Characteristics

For Reflow Process


1. C19D series are suitable for SMT processes.
2. Curing of glue in oven must be according to standard operation flow processes.

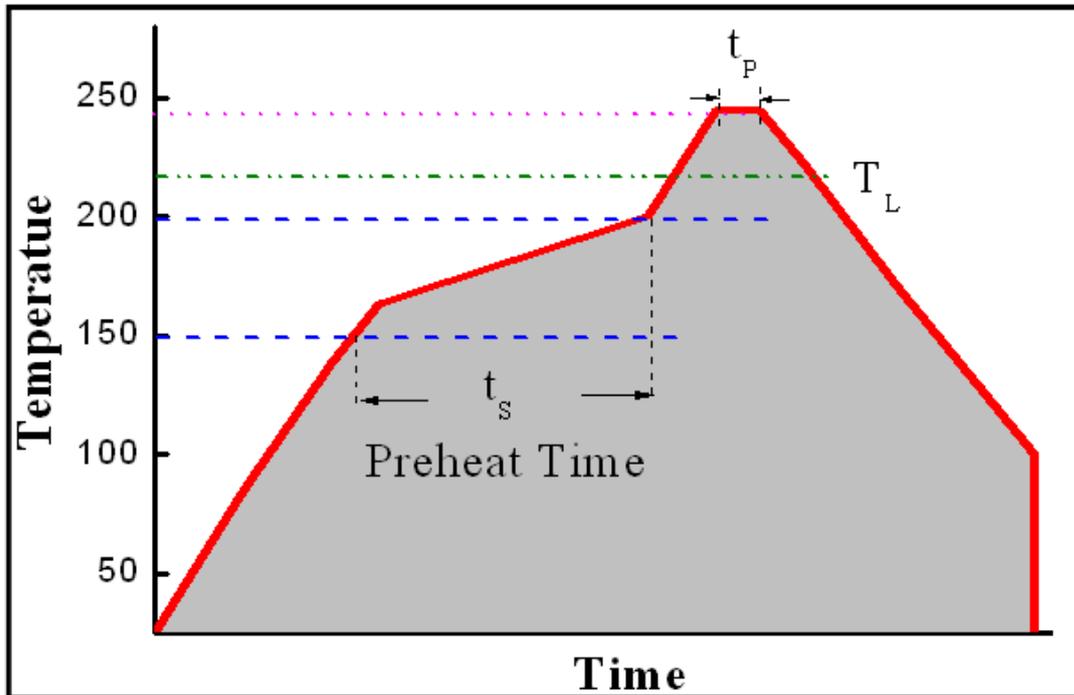

Profile Feature	Lead Free Assembly
Ramp-Up Rate	2-3 °C/S
Preheat Temperature	150-200 °C
Preheat Time (t_s)	60-120 S
Liquid Temperature (T_L)	217 °C
Time maintained above T_L	60-90 S
Peak Temperature (T_p)	240±5 °C
Peak Time (t_p)	Max 20 S
Ramp-Down Rate	3-5 °C/S


3. Reflow soldering should not be done more than twice.
4. In soldering process, stress on the LEDs during heating should be avoided.

Package Dimensions

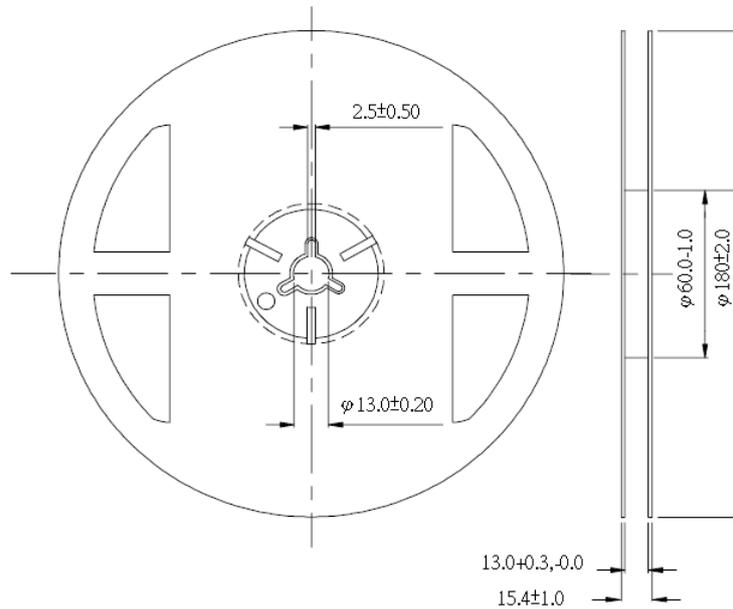


- Note: 1. Dimensions are in millimeters
- 2. The tolerances unless mentioned is ± 0.1 mm

Carrier Tape Dimensions:
Loaded quantity 400 PCS per reel.

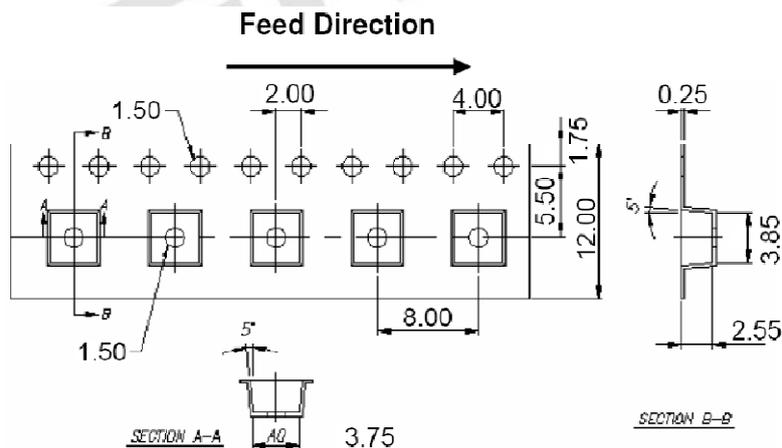

- Note: 1. Dimensions are in millimeters
- 2. The tolerances unless mentioned is ± 0.1 mm

Moisture Resistant Packaging

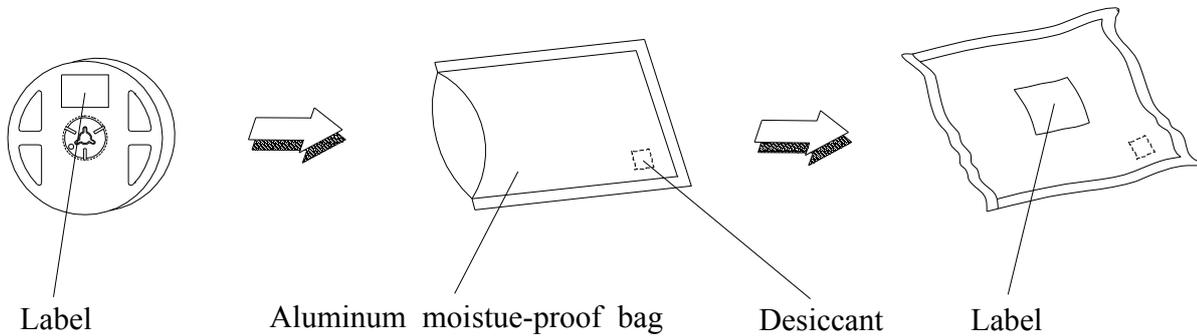

Label Form Specification



CPN: Customer's Production Number
 P/N : Production Number
 QTY: Packing Quantity
 CAT: Ranks
 HUE: Peak Wavelength
 REF: Reference
 LOT No: Lot Number
 MADE IN TAIWAN: Production Place

Notes

- Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No. 6-8, Zhonghua Rd., Shulin Dist.

New Taipei City 23860, Taiwan, R.O.C

Tel: 886-2-2685-6688

Fax: 886-2-2685-6897

<http://www.everlight.com>